

**Mod.4020-10R**  
**Mod.4020-10L**  
**Mod.4020-10C**  
Variable with 10 steps.

**Resistive, Inductive,  
Capacitive Loads.**

Provided with silk screened front panel and with 4mm CE safety sockets.

Robust metallic base with rubber feet.

**Connections:** 3-Phase Y/D,  
parallel connection /1-Phase

Single-phase :  
up to **240V 50/60Hz**  
Three-phase:  
up to **240/415V (D/Y) 50Hz**

Other power available:  
from **0,3 (Mod.3020) up to 50kVA**

**Dimensions**

-R


LxWxH: 70x40x40h cm.

-LC

LxWxH: 50x40x40h cm.

English operation manual

French operation manual

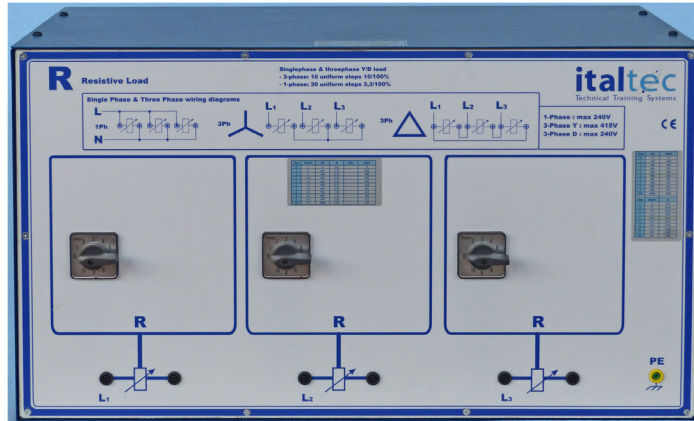

**MOD.4020-10R**

Resistive Load module,  
Variable with 10 steps

**MOD.4020-10L**

Inductive Load module,  
Variable with 10 steps

**MOD.4020-10C**

Capacitive Load module,  
Variable with 10 steps

For balanced or unbalanced 3-phase loads (star and delta) and single-phase loads.  
Each phase can be independently changed in **10 uniform steps** up to max current value of full load.  
Single-phase connection provides **30 regulation steps**.

**Regulation steps**

MOD.4020-10RLC							
Step	VA x Phase	VA total	3-Ph. Amp.	1-Ph. Amp.	$\Omega$ x Phase	C	L
1	33	100	0,14	0,44	1580	2	5
2	67	200	0,29	0,87	790	4	2,5
3	100	300	0,43	1,31	527	6	1,7
4	133	400	0,58	1,75	395	8	1,26
5	167	500	0,72	2,18	316	10	1
6	200	600	0,87	2,62	263	12	0,84
7	233	700	1,01	3,06	226	14	0,72
8	267	800	1,16	3,49	198	16	0,63
9	300	900	1,30	3,93	176	18	0,56
10	333	1000	1,45	4,37	158	20	0,51

