

SINGLE / THREE PHASE LOADS

Resistive - Inductive - Capacitive

Mod.3020 - 0,3KVA - Variable with 7 step

Mod.3020-10 - 0,3KVA - Variable with 10 step

Mod.3020-R
Mod.3020-L
Mod.3020-C

Mod.3020-10R
Mod.3020-10L
Mod.3020-10C

**Resistive, Inductive,
Capacitive Loads.**

Variable with 7 or 10 uniform steps.

Provided with silk screened front panel and with 4mm CE safety sockets.

Robust metallic base with rubber feet.

For R models the evacuation of heat is obtained thanks to an electric fan.

Single-phase :

up to 240V 50/60Hz

Three-phase:

up to 240/415V (D/Y) 50Hz

Other power available:

from 0,3 (Mod.3020) up to 20kVA (Mod.20020)


Dimensions

-TTop

LxWxH: 50x40x40h cm.

English operation manual

French operation manual


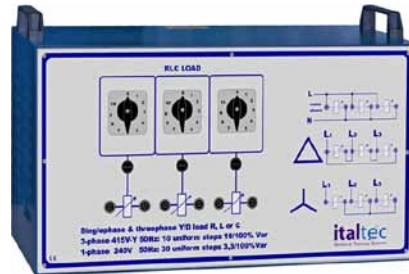


MOD.3020-R Resistive Load module, Variable with 7 step
MOD.3020-L Inductive Load module, Variable with 7 step
MOD.3020-C Capacitive Load module, Variable with 7 step

For balanced or unbalanced 3-phase loads (star and delta) and single-phase loads. Each phase can be independently varied with 7 uniform steps up to max current value for full power. Single-phase connection provides 21 regulation steps.

MOD.3020-10R Resistive Load module, variable with 10 step
MOD.3020-10L Inductive Load module, variable with 10 step
MOD.3020-10 C Capacitive Load module, variable with 10 step

For balanced or unbalanced 3-phase loads (star and delta) and single-phase loads. Each phase can be independently changed in 10 uniform steps up to max current value of full load. Single-phase connection provides 30 regulation steps.

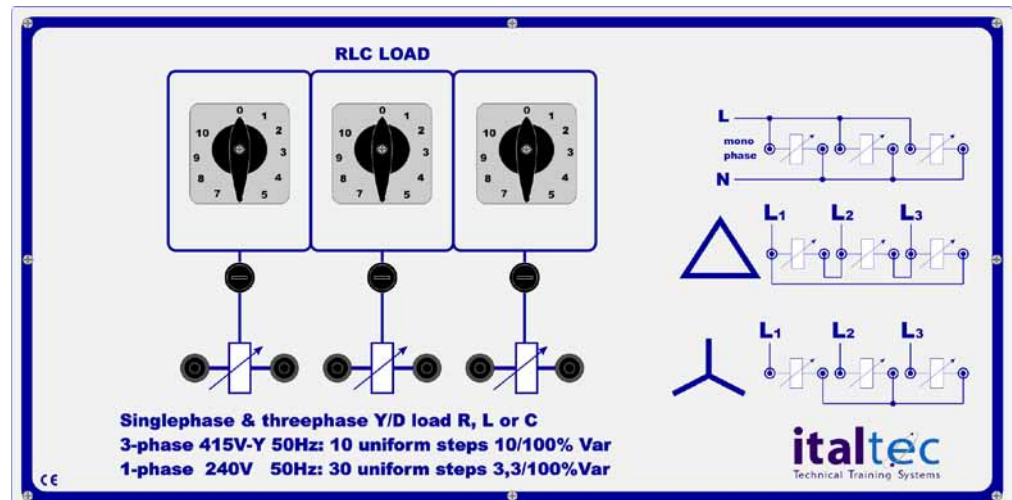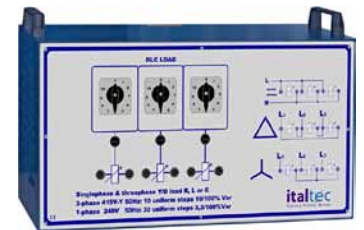

Regulation step for each-phase **MOD.3020-RLC** | **MOD.3020-10RLC**

Step	VA	Amp.	Perc.	Step	VA	Amp.	Perc.
1	17	0,07	14%	1	13	0,05	10%
2	33	0,14	29%	2	25	0,11	20%
3	50	0,22	43%	3	38	0,16	30%
4	66	0,29	57%	4	50	0,22	40%
5	83	0,36	72%	5	63	0,27	50%
6	100	0,43	86%	6	75	0,33	60%
7	116	0,51	100%	7	88	0,38	70%
				8	100	0,43	80%
				9	113	0,49	90%
				10	125	0,54	100%

Power variation (230V):
Mod.3020-RLC

1phase: 5% ÷ 100% -17÷350VA
3phase: 15% ÷ 100% -50÷350VA

Power variation (230V):
Mod.3020-10RLC

1phase: 3,3% ÷ 100% -13÷375VA
3phase: 10% ÷ 100% -37÷375VA