


3.1 - POWER SUPPLY MODULE

Mod.6000 Universal power supply. (6002+6004) (also available 220V 60Hz version).

- Power requirements: 380/400V, 3PH+N+G, 50Hz

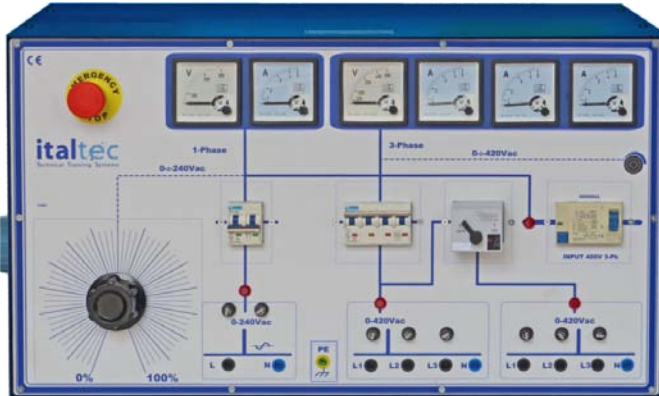

Mod.6002 3-Ph/1Ph AC power supply 10+10A

- | **Mod.6004** DC power supply 3+10A

General protection with high sensitivity magneto thermal differential (0,03A) automatic circuit breaker. Mushroom emergency push -button
All outputs are protected by means of an automatic magneto thermal circuit breaker and fuses. Adjustable 3Ph motor overload protection.
Dimensions: 2x 70x40x40h(cm)

3 phase adjustable output: 0÷450V, 10A with
- 1 x A.C. voltmeter - 3 x A.C. ammeters
adjustable motor overload protection
Single phase adjustable output: 0÷240V 10A with
- 1 x A.C. voltmeter - 1 x A.C. ammeter

DC variable output: 0÷230V, 3A with
- 1 x D.C. voltmeter - 1 x D.C. ammeter
D.C. fixed output: 220V, 10A
- with 1 x D.C. ammeter
Single phase triple output: fixed 230Vac 16A
- 1 x A.C. ammeter



Mod.6002D 3-Ph/1Ph AC power supply(Digital)



Mod.6004D -DC power supply (Digital)



Mod.6002-10-15 3-Ph AC power supply 10+15A

3 phase adjustable output: 0÷450V, 10A with
- 1 x A.C. voltmeter - 3 x A.C. ammeters
Single phase adjustable output: 0÷240V 15A with
- 1 x A.C. voltmeter - 1 x A.C. ammeter



Mod.6004-03-15 -DC power supply

DC variable output: 0÷230V, 3A with
- 1 x D.C. voltmeter - 1 x D.C. ammeter
DC fixed output: 220Vdc 15A
- 1 x A.C. ammeter