

**Mod.7021-R**  
**Mod.7021-L**  
**Mod.7021-C**

*Resistive, Inductive,  
 Capacitive Loads.  
 Variable up to 5000VA.  
 Provided with silk screened  
 front panel and with 4mm  
 CE safety sockets.  
 Robust metallic base with  
 rubber feet. For R models  
 the evacuation of heat is  
 obtained thanks to an  
 electric ventilation; a grid is  
 mounted to protect the fan.*

*Single-phase :*  
**220/230V 50/60Hz**

*Three-phase voltage:*  
**230/400V (delta/star) 50Hz**

*Power:*  
**5000VA (Other power on  
 request, up to 20kVA)**

*Power variation:*  
**5% – 100%**

*Dimensions:*  
**LxWxH: 60x40x80cm.**

*Robust sheet metal steel  
 painted in the oven,  
 mounted on four robust  
 swivel wheels for easy  
 movement.*

*English operation manual*  
*French operation manual*



**MOD.7021-R Resistive Load Module Variable with 20 step**

With 20 uniform steps from 5% to 100%; mono and 3-phase, star & delta connection. Six switches (5% 10% 15% 20% 25% 25%) allows the continuous growth of load, without interruption, up to 100% in steps of 5%.

**MOD.7021-L Inductive Load Module Variable 20 step**

With 20 uniform steps from 5% to 100%; mono and 3-phase, star & delta connection. Six switches (5% 10% 15% 20% 25% 25%) allows the continuous growth of load, without interruption, up to 100% in steps of 5%..




**MOD.7021-C Capacitive Load Module Variable 20 step**

With 20 uniform steps from 5% to 100%; mono & 3phase, star & delta connect. Six switches (5% 10% 15% 20% 25% 25%) allows the continuous growth of load, without interruption, up to 100% in steps of 5%.



Step	$\Omega$	VA	Amp.	Perc.
5	635	250	0,36	5%
10	317	500	0,72	10%
15	212	750	1,09	15%
20	159	1000	1,45	20%
25	127	1250	1,81	25%
25+5	106	1500	2,17	30%
25+10	90,7	1750	2,54	35%
25+15	79,3	2000	2,90	40%
25+20	70,5	2250	3,26	45%
25+25	63,5	2500	3,62	50%
25+25+5	57,7	2750	3,99	55%
25+25+10	52,9	3000	4,35	60%
25+25+15	48,8	3250	4,71	65%
25+25+20	45,3	3500	5,07	70%
25+25+20+5	42,3	3750	5,43	75%
25+25+20+10	39,7	4000	5,80	80%
25+25+20+15	37,3	4250	6,16	85%
25+25+20+15+5	35,3	4500	6,52	90%
25+25+20+15+10	33,4	4750	6,88	95%
25+25+20+15+10+5	31,7	5000	7,25	100%

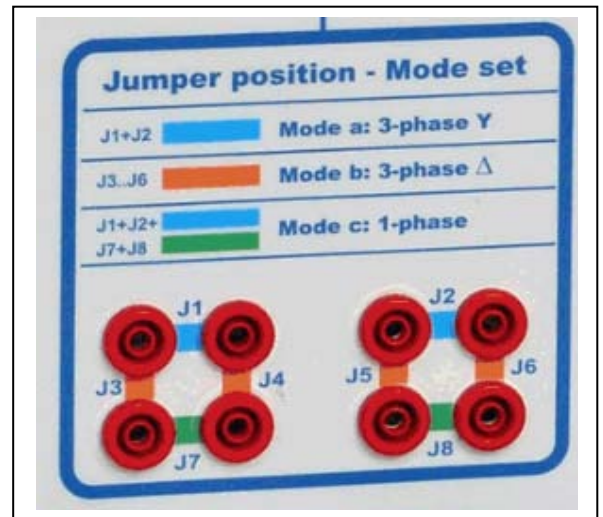

**italtec Technical Training Systems S.r.L.**

20129 – MILANO – ITALIA – Viale Regina Giovanna, 35  
 Tel. +39 02 90 721 606 – Fax. +39 02 90 720 227  
 e-mail: [italtec@italtec.it](mailto:italtec@italtec.it) [www.italtec.it](http://www.italtec.it)